

DATASHEET


liniLED®

Stair Extrusions -


Finely detailed aluminum extrusion with non-slip tread patterns support liniLED securely in the captive groove. Supplied in various lengths for field cutting and drilling.



Direct view with angled bullnose edge

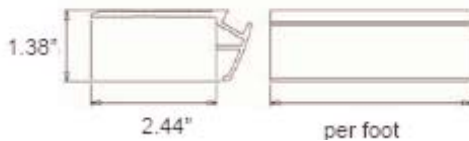

Indirect bullnose non-slip non-slip tread

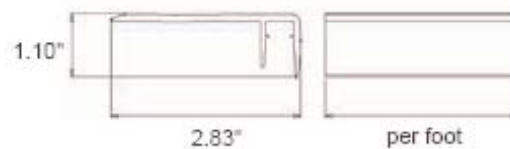

Stair Extrusion- Direct View

| | |
|---------------------|-----------------------------------|
| Dimensions | W2.44"xH1.38" |
| Material | Aluminum |
| Trim | Silver or Black anodized |
| Application | Stair lighting |
| Max. Length | 16'6" |
| Weight | 11oz per foot |
| To be used with | liniLED® |
| Product code | Description |
| 011565 | Stair extrusion, silver, per foot |
| 011567 | Stair extrusion, black, per foot |

Stair Extrusion- Indirect View

| | |
|---------------------|---|
| Dimensions | W2.83"xH1.10" |
| Material | Aluminum |
| Trim | Silver or Black anodized |
| Application | Stair lighting |
| Max. Length | 16'6" |
| Weight | 11oz per foot |
| To be used with | liniLED® |
| Product code | Description |
| 011836 | Stair extrusion, indirect, silver, per foot |
| 011837 | Stair extrusion, indirect, black, per foot |