


| | | |
|---------|------|------|
| Project | Type | Date |
|---------|------|------|

liniLED[®] Forta

In ground, drive over lines

Burable, driveover 316L stainless steel housing and IP68 connections
 Your choice of two luminous intensities: 20 lm/ft and 75 lm/ft
 Color temperatures: 2400K, 2700K, 3000K, 4000K and 6500K
 Also available in RGB, Red, Green, Blue and Amber
 May be integrated into floor and paving; perfectly suited for public applications
 Drive over applications up to 15,000 lbs.
 5 year warranty (50,000 hours)

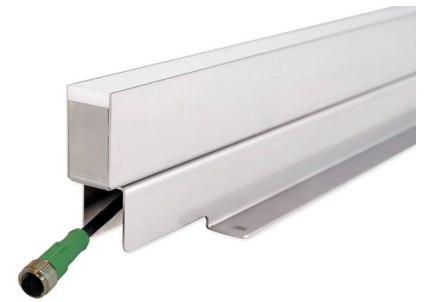

Construction

Cast polyurethane resin in a 316L stainless steel housing with IP68 connectors. Ideal for harsh environments (salt water resistant).

Mounting

In ground mount

LED

liniLED[®] strip

Degree of Protection

IP68

Weight


Drive over applications up to 15,000 lbs.

Driver / Electrical

Choice of Magnetic driver, Universal Voltage (120-277V), electronic driver or 347V electronic drivers - in either Non-Dim or 0-10v / 10% Dimming.

Connector Sets

Connections are rated IP68.

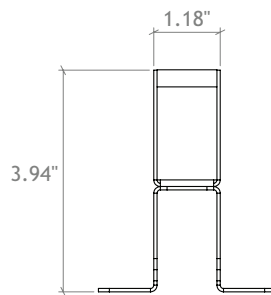

| liniLED [®] Forta | Color Temp | 1'4" Length | OLS Part # | 3'4" Length | OLS Part # | 6'7" Length | OLS Part # |
|--|-------------------------------|-------------|---------------|---------------|---------------|-------------|---------------|
| Forta (20 lm/ft) 1.18"w x 3.94"h | 2400K | .5 W | 024000 | 1.1 W | 024020 | 2.2 W | 024040 |
| | 2700K | .5 W | 024001 | 1.1 W | 024021 | 2.2 W | 024041 |
| | 3000K | .5 W | 024002 | 1.1 W | 024022 | 2.2 W | 024042 |
| | 4000K | .5 W | 024003 | 1.1 W | 024023 | 2.2 W | 024043 |
| | 6500K | .5 W | 024004 | 1.1 W | 024024 | 2.2 W | 024044 |
| | RGB | 2.4 W | 024010 | 6 W | 024030 | 11.9 W | 024050 |
| | Red | 1.8 W | 024005 | 4.4 W | 024025 | 8.8 W | 024045 |
| | Green | 1.0 W | 024006 | 2.5 W | 024026 | 5.0 W | 024046 |
| | Blue | .7 W | 024007 | 1.7 W | 024027 | 3.4 W | 024047 |
| | Amber | 1.8 W | 024008 | 4.4 W | 024028 | 8.8 W | 024048 |
| Forta (75 lm/ft) 1.18"w x 3.94"h | 2400K | 1.8 W | 024100 | 4.5 W | 024120 | 9.0 W | 024140 |
| | 2700K | 1.8 W | 024101 | 4.6 W | 024121 | 9.2 W | 024141 |
| | 3000K | 1.7 W | 024102 | 4.3 W | 024122 | 8.6 W | 024142 |
| | 4000K | 1.6 W | 024103 | 4.1 W | 024123 | 8.2 W | 024143 |
| | 6500K | 1.6 W | 024104 | 4.1 W | 024124 | 8.2 W | 024144 |
| | Red | 3.3 W | 024105 | 8.3 W | 024125 | 16.6 W | 024145 |
| | Green | 2.0 W | 024106 | 4.9 W | 024126 | 9.8 W | 024146 |
| | Blue | 3.0 W | 024107 | 7.2 W | 024127 | 14.4 W | 024147 |
| | Amber | 3.3 W | 024108 | 8.3 W | 024128 | 16.6 W | 024148 |
| | Forta Mounting Bracket | | | 024200 | | | |
| Forta Connector Set | | 16'L | 014530 | 33'L | 014507 | | |
| | | 16'L | 014508 | 33'L | 014509 | | |
| Extension Cord | | | | | | | |

Specifications are correct at the time of publishing, but may be modified or improved in accordance with current electrical, safety or manufacturing methods without notification.