


Project	Type	Date
---------	------	------

liniLED® Forta

In ground, drive over lines

Buriable, driveover 316L stainless steel housing and IP68 connections
 Your choice of two luminous intensities: Forta - 20 lm/ft and Forta Plus - 75 lm/ft
 Color temperatures: 2400K, 2700K, 3000K, 4000K and 6500K
 Also available in RGB, Red, Green, Blue, and Amber
 May be integrated into floor and paving; perfectly suited for public applications
 Drive over applications up to 15,000 lbs.
 5 year warranty (50,000 hours)

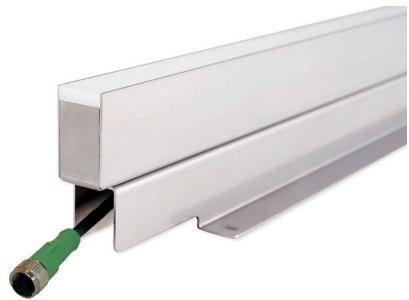

Construction

Cast polyurethane resin in a 316L stainless steel housing with IP68 connectors. Ideal for harsh environments (salt water resistant).

Mounting

In ground mount

LED

liniLED® strip

Degree of Protection

IP68

Weight

Drive over applications up to 15,000 lbs.

Driver / Electrical

Choice of Magnetic driver, Universal Voltage (120-277V), electronic driver or 347V electronic drivers - in either Non-Dim or 0-10v / 10% Dimming.

Connector Sets

Connections are rated IP68.



liniLED® Forta and Forta Plus	Color Temp	1'4" Length	OLS Part #	3'4" Length	OLS Part #	6'7" Length	OLS Part #
Forta (20 lm/ft) 1.18" w x 3.94" h	2400K	.5 W	024000	1.1 W	024020	2.2 W	024040
	2700K	.5 W	024001	1.1 W	024021	2.2 W	024041
	3000K	.5 W	024002	1.1 W	024022	2.2 W	024042
	4000K	.5 W	024003	1.1 W	024023	2.2 W	024043
	6500K	.5 W	024004	1.1 W	024024	2.2 W	024044
	RGB	2.4 W	024010	6 W	024030	11.9 W	024050
	Red	1.8 W	024005	4.4 W	024025	8.8 W	024045
	Green	1.0 W	024006	2.5 W	024026	5.0 W	024046
	Blue	.7 W	024007	1.7 W	024027	3.4 W	024047
	Amber	1.8 W	024008	4.4 W	024028	8.8 W	024048
Forta Plus (75 lm/ft) 1.18" w x 3.94" h	2400K	1.8 W	024100	4.5 W	024120	9.0 W	024140
	2700K	1.8 W	024101	4.6 W	024121	9.2 W	024141
	3000K	1.7 W	024102	4.3 W	024122	8.6 W	024142
	4000K	1.6 W	024103	4.1 W	024123	8.2 W	024143
	6500K	1.6 W	024104	4.1 W	024124	8.2 W	024144
	RGB	2.9 W	024110	7.3 W	024129	14.5 W	024149
	Red	3.3 W	024105	8.3 W	024125	16.6 W	024145
	Green	2.0 W	024106	4.9 W	024126	9.8 W	024146
	Blue	3.0 W	024107	7.2 W	024127	14.4 W	024147
	Amber	3.3 W	024108	8.3 W	024128	16.6 W	024148
Forta Connector Set		16'L	014530	33'L	014507		
	Extension Cord		16'L	014508	33'L	014509	

Specifications are correct at the time of publishing, but may be modified or improved in accordance with current electrical, safety or manufacturing methods without notification.

