


Project

Type

Date





iniLED<sup>®</sup> Stair Extrusions

# iniLED<sup>®</sup> Stair Extrusions

Direct & Indirect

Direct view with angled bullnose edge

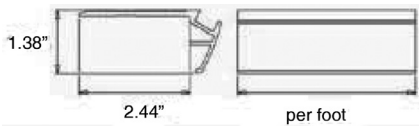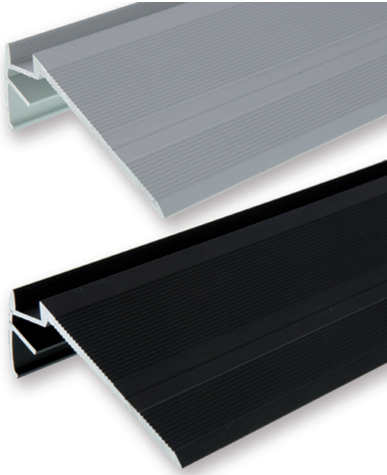

## iniLED<sup>®</sup> Stair Extrusions

Finely detailed aluminum extrusion with non-slip tread patterns support iniLED securely in the captive groove. Supplied in various lengths for field cutting and drilling.


### iniLED<sup>®</sup> Stair Extrusion - Direct View

Dimensions	W2.44"xH1.38"
Material	Aluminum
Trim	Silver or Black anodized Stair lighting
Application	Stair Lighting
Length	16'6" max, stocked 6'6"
Weight	11oz per foot
Used with	iniLED <sup>®</sup>

### OLS Part # Description

011565	Stair extrusion, silver, per foot
011567	Stair extrusion, black, per foot

Indirect bullnose non-slip tread

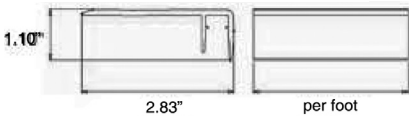

### iniLED<sup>®</sup> Stair Extrusion - Indirect View

Dimensions	W2.44"xH1.38"
Material	Aluminum
Trim	Silver or Black anodized Stair lighting
Application	Stair Lighting
Length	16'6" max, stocked 6'6"
Weight	11oz per foot
Used with	iniLED <sup>®</sup>

### OLS Part # Description

011836	Stair extrusion, indirect, silver, per foot
011837	Stair extrusion, indirect, black, per foot

Specifications are correct at the time of publishing, but may be modified or improved in accordance with current electrical, safety or manufacturing methods without notification.