


UnderCAB 45°

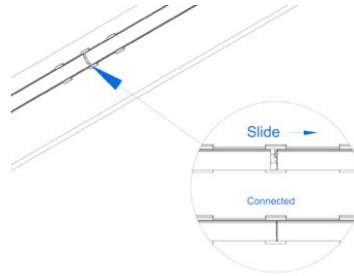

- Rigid extruded aluminum housing with PC Diffuser
- 2700K, 3500K, 4000K, 5000K
- IP20 Indoor Application
- 24V DC
- Lengths available in 5", 7", 12", 36" and 48"
- 420lm/ft, 6w/ft
- Max run 16'/ Max load per run 96W
- ETL / CE
- 5 year limited warranty; 50,000hrs white, 100,000hrs color
- Dimmable 0-10V

PART NUMBER & SPECIFICATIONS

Part #	Length	Color	Current (A)	CRI	lm	W	Bin
036300	5"	2700K	350mA	> 80	175	2.2	±50
036302	5"	3500K	350mA	> 80	175	2.2	±50
036304	5"	4000K	350mA	> 80	175	2.2	±50
036306	5"	5000K	350mA	> 80	175	2.2	±50
036310	7"	2700K	350mA	> 80	245	3.5	±50
036312	7"	3500K	350mA	> 80	245	3.5	±50
036314	7"	4000K	350mA	> 80	245	3.5	±50
036316	7"	5000K	350mA	> 80	245	3.5	±50
036320	12"	2700K	350mA	> 80	420	6	±50
036322	12"	3500K	350mA	> 80	420	6	±50
036324	12"	4000K	350mA	> 80	420	6	±50
036326	12"	5000K	350mA	> 80	420	6	±50
036330	24"	2700K	350mA	> 80	840	12	±50
036332	24"	3500K	350mA	> 80	840	12	±50
036334	24"	4000K	350mA	> 80	840	12	±50
036336	24"	5000K	350mA	> 80	840	12	±50
036340	36"	2700K	350mA	> 80	1260	18	±50
036342	36"	3500K	350mA	> 80	1260	18	±50
036344	36"	4000K	350mA	> 80	1260	18	±50
036346	36"	5000K	350mA	> 80	1260	18	±50
036350	48"	2700K	350mA	> 80	1680	24	±50
036352	48"	3500K	350mA	> 80	1680	24	±50
036354	48"	4000K	350mA	> 80	1680	24	±50
036356	48"	5000K	350mA	> 80	1680	24	±50

Project

Type

Date

ACCESSORIES

Magnetic connectors instantly connect fixtures to perfectly fit any space. Magnetically connected power and extension leads with miniature wires are easily concealed.




2' Power Connector
#036450

6' Power Connector
#036452



6" Extension M/F Connector
#036450

12" Extension M/F Connector
#036450



End Cap
#036470

Mounting Clip
#036480

POWER SUPPLIES

24V DC; 0-10V and Magnetic Power Supplies options ranging from 25W-300W.



- 0-10V; 120-277V
- 25W , IP20 #011380
- 40W , IP20 #011381
- 60W , IP67 #011382
- 75W , IP67 #011383
- 100W , IP67 #011384



Specifications are correct at the time of publishing, but may be modified or improved in accordance with current electrical, safety or manufacturing methods without notification.