



OrgaLED® Cove System

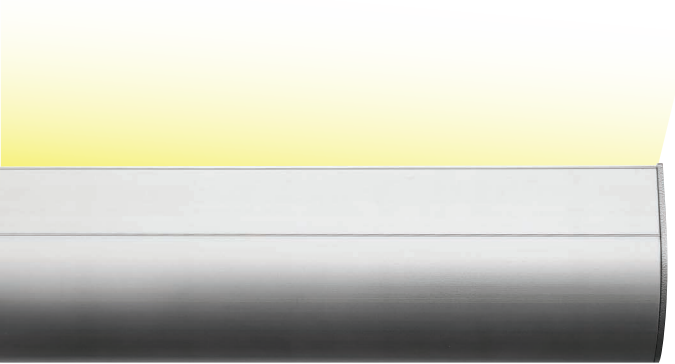

SYSTEM OVERVIEW

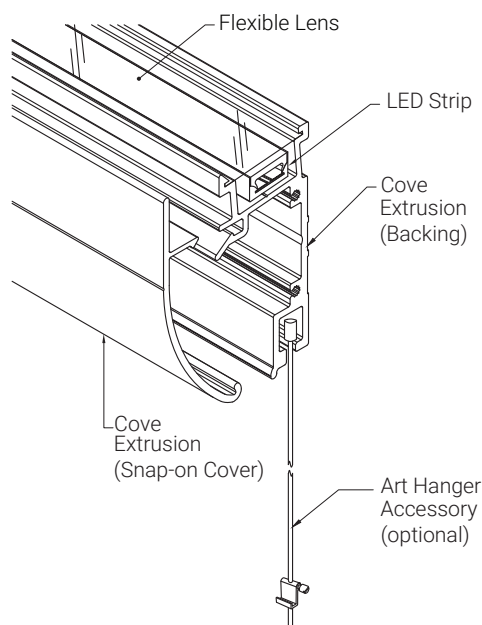

- Aluminum 6061 Extrusion, Anodized
- Snap-on Cover for a Seamless Design
- Available in 8'3" Standard Lengths
- IK10 Rated
- Polycarbonate Snap-in Lens
- Optional Art Hanger Accessory
- Custom Powder Coat Finish Available
- Simple Slide-Fed Installation

PART NUMBER & SPECIFICATIONS

Part #	Description
011580-C	Cove Extrusion Cover
011580-B	Cove Extrusion Backing
011591-C	Snap-in Cove Clear Lens
011580-ECLS	Cove Left End Cap
011580-ECRS	Cove Right End Cap
011580-CB	Cove Art Hanging Accessory

Specifications may be modified or improved without notification.

ORGANIC LIGHTING®

Project


Date

APPLICATIONS


Cove System - UpLight




Uplight - Profile View

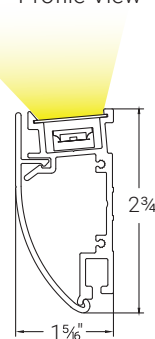

Cove System - DownLight

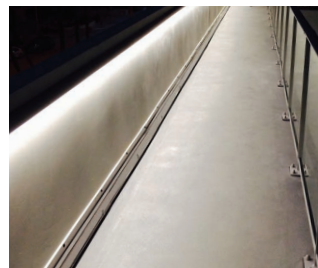


Downlight - Profile View



OrgaLED® Cove Extrusion

LED STRIPS - 24V | CONNECTORS

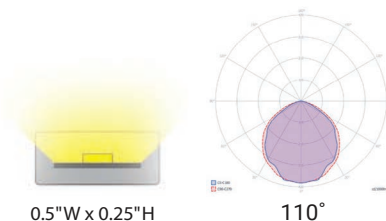

FEATURES

- Very Flexible (Bend radius >1.2")
- High Efficacy- 127 lm/W
- High Density- 8 LEDs per cuttable section
- 24V DC - Low Voltage, Class 2
- Up to 66ft Continuous Runs
- 2700K, 3000K, 3500K, 4000K, 5000K
- Field Cuttable 1.96in
- Dimmable
- UV/IR protected PVC encapsulation
- IP40 or IP67 Wet Location
- UL Listed / CE /ROHS
- 5 years / 50,000 hrs warranty

PART NUMBER & SPECIFICATIONS

OrgaLED® Power Top

Part #	Color	CRI	lm/ft*	W/ft
041201	2700K	>94	116.84	1
041202	3000K	>94	120.14	1
041203	3500K	>94	120.14	1
041204	4000K	>94	127	1
041205	5000K	>94	127	1

OrgaLED® High Power Top

Part #	Color	CRI	lm/ft*	W/ft
041301	2700K	>94	198.63	1.7
041302	3000K	>94	204.24	1.7
041303	3500K	>94	204.24	1.7
041304	4000K	>94	215.9	1.7
041305	5000K	>94	215.9	1.7

ORGANIC LIGHTING®

ACCESSORIES

OrgaLED strips offer a range of 'Plug & Play' IP40 and IP67 field installable connectors or factory installed IP67 connections.



Straight Connector Cable 16ft
IP40 / IP67
#041002



L-Connector Cable 16ft
IP40 / IP67
#041003



Jumper Cable 8in
IP40 / IP67
#041004



Top End Cap | IP40 / IP67
#041001



L-Splice Connector
IP40 / IP67
#041005



Inline Connector
IP40 / IP67
#041006



IP67 Waterproofing Kit
#011511

Specifications may be modified or improved without notification.



OrgaLED® Cove Extrusion

POWER SUPPLIES - 24V

Forward Phase, Reverse Phase, & 0-10V Dimming Drivers. Remote enclosures available.

Part #	Ingress	Voltage	Wattage	Dimensions (inches)	Description
045001	IP67	100-305V	20W	7.6 x 1.18 x 0.79	Dimmable LED Driver
045002	IP67	100-305V	40W	5.83 x 1.57 x 0.87	Dimmable LED Driver
045003	IP67	120-277V	60W	6.3 x 2.24 x 1.5	Dimmable LED Driver
045004	IP67	120-277V	75W	6.3 x 2.24 x 1.5	Dimmable LED Driver
045005	IP67	120-277V	96W	7.6 x 2.24 x 1.5	Dimmable LED Driver
045006	IP67	120-277V	200W	10.1 x 3.03 x 1.8	Dimmable LED Driver
045007	IP67	120-277V	300W	11.9 x 3.03 x 1.8	Dimmable LED Driver



20W Dimmable Driver




75W Dimmable Driver

ENCLOSURES

Part #	Ingress	Dimensions (inches)	Description
045008	IP67	9.4 x 2.6 x 1.9	20W Enclosure
045009	IP67	11.02 x 4.05 x 2.2	40W Enclosure
045010	IP67	11.02 x 4.05 x 2.2	60W Enclosure
045011	IP67	11.02 x 4.05 x 2.2	75W Enclosure
045012	IP67	11.02 x 4.05 x 2.2	96W Enclosure
045013	IP67	16.7 x 9.8 x 2.3	200W Enclosure
045014	IP67	16.7 x 9.8 x 2.3	300W Enclosure

ELECTRICAL DETAILS

*Regular Connection (Mono)

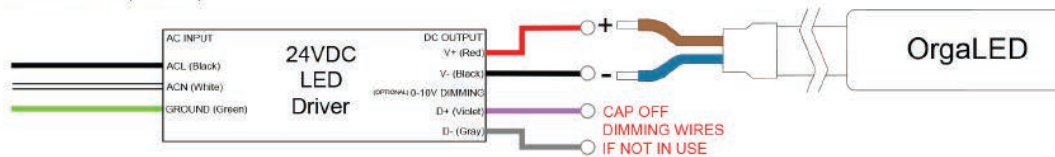

Specifications may be modified or improved without notification.

