


Aqueon® Diffuse Mono

STANDARD & HIGH POWER 24V DC 22 27 30 35 40 57 R G B A

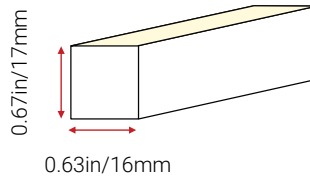

ORGANIC LIGHTING®

Project


Date

FEATURES

- Submersible; UL Listed, 2108
- Horizontal or Vertical bending options
- End to end continuous illumination
- Up to 49.2ft(15m) continuous runs; Flood and vibration proof
- Cuttable every 2"(51mm) (White, Green, Blue) & 3.25"(83mm) (Red, Amber)
- 2200K, 2700K, 3000K, 3500K, 4000K, 5700K, Red, Green, Blue & Wildlife Amber
- Ultra low energy; 1.83W/ft (6W/m)
- 11.8" (300mm) minimum bending diameter; 5.5"(140mm) minimum bending radius
- 5 year limited warranty; 60,000 hrs white, 100,000 hrs color LED lifetime
- Dimmable with Pulse Width Modulation & DMX
- UV/IR protected Silicone material
- Ambient working temperature -40°F - 113°F

ANTI-WICKING


All connections include a ferrule on the power feed to prevent water wicking through the connection point.




PART NUMBER & SPECIFICATIONS

Part #	Color	CRI	lm/ft	lm/m	Max Run	W/ft	W/m	
Standard Aqueon® Diffuse Mono - Horizontal Bend								
052204	2200K	>95	58	190	49.2ft	15m	1.83	6
052205	2700K	>95	72	235	49.2ft	15m	1.83	6
052236	3000K	>95	72	235	49.2ft	15m	1.83	6
052237	3500K	>95	73	240	49.2ft	15m	1.83	6
052238	4000K	>95	73	240	49.2ft	15m	1.83	6
052239	5700K	>95	73	240	49.2ft	15m	1.83	6
052210	Red	>95	33	110	49.2ft	15m	1.83	6
052211	Green	>95	69	225	49.2ft	15m	1.83	6
052212	Blue	>95	17	55	49.2ft	15m	1.83	6
052213	Amber	>95	33	110	49.2ft	15m	1.83	6
Standard Aqueon® Diffuse Mono - Vertical Bend								
052203	2200K	>95	64	225	49.2ft	15m	1.83	6
052229	2700K	>95	64	280	49.2ft	15m	1.83	6
052230	3000K	>95	64	280	49.2ft	15m	1.83	6
052231	3500K	>95	73.2	290	49.2ft	15m	1.83	6
052232	4000K	>95	73.2	290	49.2ft	15m	1.83	6
052233	5700K	>95	64	290	49.2ft	15m	1.83	6
052206	Red	>95	19.8	123	49.2ft	15m	1.83	6
052207	Green	>95	45.7	275	49.2ft	15m	1.83	6
052208	Blue	>95	7.6	60	49.2ft	15m	1.83	6
052209	Amber	>95	19.8	123	49.2ft	15m	1.83	6

HORIZONTAL BENDING

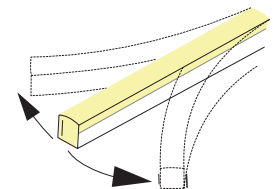

VERTICAL BENDING



Specifications may be modified or improved without notification

Aqueon® Diffuse Mono Standard & High Power



HIGH POWER

A new standard of flexible light; superior standards new materials, new methods, military grade components and advanced circuit design to create a flood proof; vibration proof seamless light. Our constant current design ensures to maintain a full illumination in continuous lengths up to 33ft(10m). Available in both vertical and horizontal bending. IP67 or IP68 submersible. Very High lumen output.


Project

Date


PART NUMBER & SPECIFICATIONS

Part #	Color	CRI	lm/ft	lm/m	Max Run	W/ft	W/m
High Power Aqueon® Diffuse Mono - Horizontal Bend							
052204-15	2200K	>95	152	500	33ft	10m	4.57 15
052205-15	2700K	>95	183	600	33ft	10m	4.57 15
052236-15	3000K	>95	183	600	33ft	10m	4.57 15
052237-15	3500K	>95	213	700	33ft	10m	4.57 15
052238-15	4000K	>95	213	700	33ft	10m	4.57 15
052239-15	5700K	>95	213	700	33ft	10m	4.57 15
052210-8	Red	>95	50	165	33ft	10m	2.44 8
052211-12	Green	>95	137	450	33ft	10m	3.66 12
052212-12	Blue	>95	34	110	33ft	10m	3.66 12
052213-8	Amber	>95	50	165	33ft	10m	2.44 8
High Power Aqueon® Diffuse Mono - Vertical Bend							
052203-15	2200K	>95	183	600	33ft	10m	4.57 15
052229-15	2700K	>95	213	700	33ft	10m	4.57 15
052230-15	3000K	>95	213	700	33ft	10m	4.57 15
052231-15	3500K	>95	244	800	33ft	10m	4.57 15
052232-15	4000K	>95	244	800	33ft	10m	4.57 15
052233-15	5700K	>95	244	800	33ft	10m	4.57 15
052206-8	Red	>95	56	185	33ft	10m	2.44 8
052207-12	Green	>95	168	550	33ft	10m	3.66 12
052208-12	Blue	>95	37	120	33ft	10m	3.66 12
052209-8	Amber	>95	56	185	33ft	10m	2.44 8

HORIZONTAL BENDING

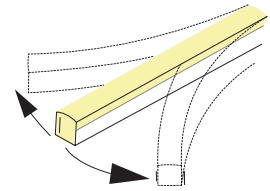

VERTICAL BENDING




Aqueon® Diffuse Mono Standard & High Power

CONNECTORS & ACCESSORIES


Factory assembled 2-wired Aqueon Mono IP68 submersible accessories include end caps, extension cords and connectors with customizable cord lengths. IP67 self assembly connectors are also available.

Project
Date


FACTORY ASSEMBLED IP68 CONNECTORS

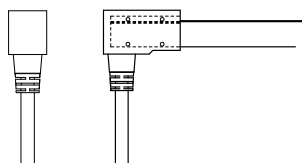


Bottom Feed Connector, 16'L
#052250-CU16



Side Feed Connector, 16'L
#052263-CU16




End Connector, 16'L
#052278-CU16



End Cap
#052286




Extension
#052279



T-Connector
#052280


FIELD ASSEMBLY SNAP ON IP67 CONNECTORS

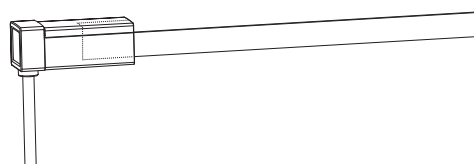


Bottom Snap Connector, 16'L
#052250S-CU16




Side Feed Snap Connector, 16'L
#052263S-CU16

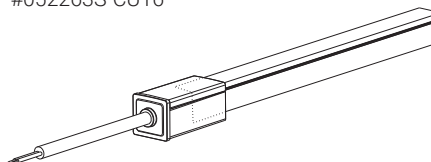


End Snap Connector, 16'L
#052278S-CU16



Snap End Cap
#052286S

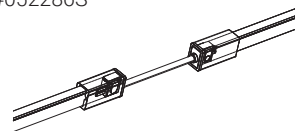

Snap Extension
#052279S

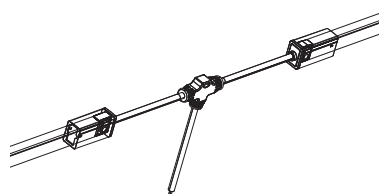

Snap T-Connector
#052280S

Specifications may be modified or improved without notification

Aqueon® Diffuse Mono Standard & High Power

POWER SUPPLIES, MOUNTINGS & EXTRUSIONS

POWER SUPPLIES - 24V

Forward Phase, Reverse Phase, & 0-10V Dimming Drivers. Remote enclosures available.

Part #	Ingress	Voltage	Wattage	Dimensions (inches / mm)	Description
045001	IP67	100-305V	20W	7.6 x 1.18 x 0.79 / 193 x 30 x 20	Dimmable LED Driver
045002	IP67	100-305V	40W	5.83 x 1.57 x 0.87 / 148 x 40 x 22	Dimmable LED Driver
045003	IP67	120-277V	60W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045004	IP67	120-277V	75W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045005	IP67	120-277V	96W	7.6 x 2.24 x 1.5 / 193 x 57 x 38	Dimmable LED Driver
045006	IP67	120-277V	200W	10.1 x 3.03 x 1.8 / 257 x 77 x 46	Dimmable LED Driver
045007	IP67	120-277V	300W	11.9 x 3.03 x 1.8 / 302 x 77 x 46	Dimmable LED Driver

ENCLOSURES

Part #	Ingress	Dimensions (inches / mm)	Description
045008	IP67	9.4 x 2.6 x 1.9 / 239 x 66 x 48	20W Enclosure
045009	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	40W Enclosure
045010	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	60W Enclosure
045011	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	75W Enclosure
045012	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	96W Enclosure
045013	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	200W Enclosure
045014	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	300W Enclosure

DMX CONTROLLER

Part #	Description
011343	100W Digital Controller
011344	180W Digital Controller
011345	720W Digital Controller
011341	Digital Controller & Power Supply Combination
011420	Nicolaude DE3 DMX 512 Controller
011403	Nicolaude DINA-DR1 DMX 512 Controller
050203	LT-200 SPI Controller - For Pixel
050205	DMX512 SPI Converter Decoder - For Pixel

MOUNTINGS & EXTRUSIONS

Mounting Channels to Match any Installation

Aluminum Profile



- High Quality Aluminum
- Lightweight
- Cost Effective
- Warp/corrosion resistant

1.38in(35mm) L - #053001
39.37in(1000mm) L - #053000

Flanged Aluminum Profile



- High Quality Aluminum
- Lightweight
- Cost Effective
- Flange for Recessed Installation

1.38in(35mm) L - #053003
39.37in(1000mm) L - #05302

Flanged Internal Serrated Aluminum Profile



- Lightweight
- Easy to Install & Dismantle
- Continuous & Strong Gripping
- Flange for Recessed Installation

0.79in(20mm) L - #053011
39.37in(1000mm) L - #053010

Internal Serrated Aluminum Profile



- Continuous & Strong Gripping
- Lightweight
- Easy to Install & Dismantle
- For Suspended Installations

0.79in(20mm) L - #053009
39.37in(1000mm) L - #053008

Bendable Serrated Aluminum Profile



- High Quality Aluminum
- Easy to Install & Dismantle
- Continuous & Strong Gripping
- Memory Retaining
- Perfect for Curved Installations

19.68in(500mm) L - #053013
39.37in(1000mm) L - #053012

Thickened Plastic Profile



- Plastic Profile 0.12in(3mm) thick
- Lightweight
- Cost Effective
- Rust & Corrosion Resistant

1.38in(35mm) L - #053005
39.37in(1000mm) L - #053004



Project

Date

20W -60W Dimmable Driver



75W -300W Dimmable Driver



Digital Controller (100W, 180W, 720W)



Nicolaude DE3 DMX 512 Controller



Specifications may be modified or improved without notification

CABLE REQUIREMENT

Cable X Information	LED Strip	Max. Cable Length
High Power		24V
22 AWG x 2	3.28ft / 1m	249.7ft / 76.1m
	6.56ft / 2m	138.7ft / 42.3m
	9.84ft / 3m	91.1ft / 27.8m
	13.12ft / 4m	67.8ft / 20.7m
	16.4ft / 5m	54.5ft / 16.6m
	19.7ft / 6m	45.6ft / 13.9m
	22.97ft / 7m	39.1ft / 11.9m
	26.25ft / 8m	34.1ft / 10.4m
	29.53ft / 9m	30.4ft / 9.3m
	32.8ft / 10m	27.4ft / 8.3m
	36.1ft / 11m	24.9ft / 7.6m
	39.4ft / 12m	22.9ft / 7.0m
	42.7ft / 13m	21.1ft / 6.4m
	45.9ft / 14m	19.6ft / 6.0m
20 AWG x 2	3.28ft / 1m	405.8ft / 123.7m
	6.56ft / 2m	202.9ft / 61.8m
	9.84ft / 3m	133.2ft / 40.6m
	13.12ft / 4m	99.2ft / 30.2m
	16.4ft / 5m	79.7ft / 24.3m
	19.7ft / 6m	66.6ft / 20.3m
	22.97ft / 7m	57.2ft / 17.4m
	26.25ft / 8m	49.9ft / 15.2m
	29.53ft / 9m	44.4ft / 13.5m
	32.8ft / 10m	40.0ft / 12.2m
	36.1ft / 11m	36.4ft / 11.1m
	39.4ft / 12m	33.4ft / 10.2m
	42.7ft / 13m	30.9ft / 9.4m
	45.9ft / 14m	28.7ft / 8.7m
	49.2ft / 15m	26.8ft / 8.2m
	52.5ft / 16m	25.1ft / 7.7m
	55.8ft / 17m	23.7ft / 7.2m
	59.1ft / 18m	22.4ft / 6.8m
62.3ft / 19m	21.2ft / 6.5m	
65.6ft / 20m	20.2ft / 6.1m	
18 AWG x 2	3.28ft / 1m	632.1ft / 192.7m
	6.56ft / 2m	316.0ft / 96.3m
	9.84ft / 3m	207.5ft / 63.3m
	13.12ft / 4m	154.5ft / 47.1m
	16.4ft / 5m	124.2ft / 37.8m
	19.7ft / 6m	103.8ft / 31.6m
	22.97ft / 7m	89.1ft / 27.2m
	26.25ft / 8m	77.7ft / 23.7m
	29.53ft / 9m	69.2ft / 21.1m
	32.8ft / 10m	62.4ft / 19.0m
	36.1ft / 11m	56.8ft / 17.3m
	39.4ft / 12m	52.1ft / 15.9m
	42.7ft / 13m	48.1ft / 14.7m
	45.9ft / 14m	44.7ft / 13.6m
	49.2ft / 15m	41.8ft / 12.7m
	52.5ft / 16m	39.2ft / 11.9m
	55.8ft / 17m	36.9ft / 11.2m
	59.1ft / 18m	34.9ft / 10.6m
	62.3ft / 19m	33.0ft / 10.1m
	65.6ft / 20m	31.4ft / 9.6m

Cable X Information	LED Strip	Max. Cable Length
High Power		24V
16 AWG x 2	3.28ft / 1m	1030ft / 314m
	6.56ft / 2m	515ft / 157m
	9.84ft / 3m	338.2ft / 103.1m
	13.12ft / 4m	251.8ft / 76.7m
	16.4ft / 5m	202.3ft / 61.7m
	19.7ft / 6m	169.1ft / 51.5m
	22.97ft / 7m	145.3ft / 44.3m
	26.25ft / 8m	126.6ft / 38.6m
	29.53ft / 9m	112.7ft / 34.4m
	32.8ft / 10m	101.6ft / 31.0m
	36.1ft / 11m	92.5ft / 28.2m
	39.4ft / 12m	84.9ft / 25.9m
	42.7ft / 13m	78.4ft / 23.9m
	45.9ft / 14m	72.9ft / 22.2m
14 AWG x 2	49.2ft / 15m	68.1ft / 20.7m
	52.5ft / 16m	63.8ft / 19.5m
	55.8ft / 17m	60.1ft / 18.3m
	59.1ft / 18m	56.8ft / 17.3m
	62.3ft / 19m	53.8ft / 16.4m
	65.6ft / 20m	51.2ft / 15.6m
	3.28ft / 1m	1615.3ft / 492.3m
	6.56ft / 2m	807.6ft / 246.2m
	9.84ft / 3m	530.4ft / 161.7m
	13.12ft / 4m	394.8ft / 120.3m
16.4ft / 5m	317.3ft / 96.7m	
19.7ft / 6m	265.2ft / 80.8m	
22.97ft / 7m	227.8ft / 69.4m	
26.25ft / 8m	198.5ft / 60.5m	
29.53ft / 9m	176.8ft / 53.9m	
32.8ft / 10m	159.4ft / 48.6m	
36.1ft / 11m	145.0ft / 44.2m	
39.4ft / 12m	133.1ft / 40.6m	
42.7ft / 13m	123.0ft / 37.5m	
45.9ft / 14m	114.3ft / 34.8m	
49.2ft / 15m	106.7ft / 32.5m	
52.5ft / 16m	100.1ft / 30.5m	
55.8ft / 17m	94.3ft / 28.7m	
59.1ft / 18m	89.1ft / 27.1m	
62.3ft / 19m	84.4ft / 25.7m	
65.6ft / 20m	80.2ft / 24.5m	