

AC LED Strip

120V AC




FEATURES

- Driver-less AC LED
- 2700K, 3000K, 3500K, 4000K, 5000K
- IP40; IP67 Wet location (specify connectors)
- Factory cuttable every 3"(76.2mm)
- Up to 112' for 2W/ft AC LED and 66' for 4W/ft AC LED
- Bend radius 1.2" (30.5mm)
- ETL certified
- 5 year limited warranty; 50,000 hrs white
- Reverse Phase / MLV dimming
- UV/IR protected PVC encapsulated

ORGANIC LIGHTING®

Project

Date



AC LED Strip

ACCESSORIES

ORGANIC LIGHTING®

Project

Date



6ft (1.8m) Power Cord Hardwire
#037008

25ft (7.6m) Power Cord Hardwire
#037014



6ft (1.8m) Power Cord Plug & Play
#037016

25ft (7.6m) Power Cord Plug & Play
#037015



Inline Connector
#037003



8in (203mm) Jumper Cable
#037010

12 (304mm) Jumper Cable
#037011

24 (610mm) Jumper Cable
#037004



Elbow Connector
#037012



End Cap
#037001



AC LED Spring Clip
#036112



Waterproof Mini J-Box
#PC-JBOX




Surge Protection
10KV (120-277V)
#040901



Surge Protection
20KV (120-277V)
#040900

ELECTRICAL DETAILS

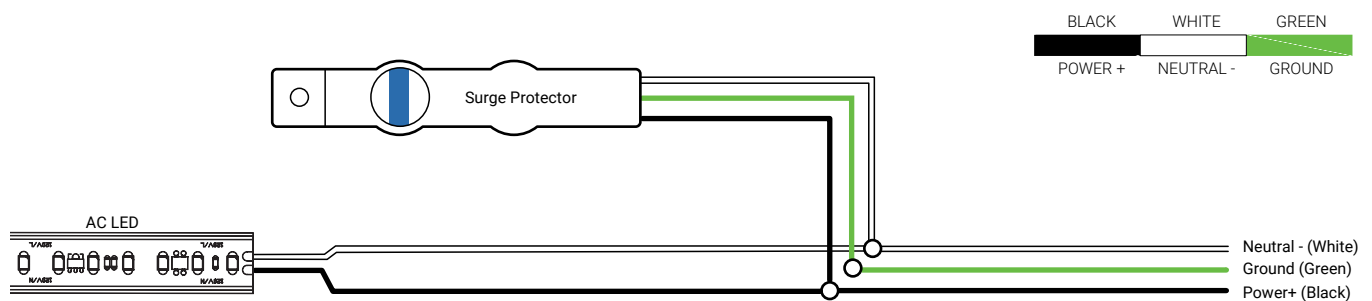

Specifications may be modified or improved without notification

Organic Lighting | 12203 Magnolia Avenue, Suite 1, Riverside CA 92503 | 626.969.6140 | www.organiclighting.com | 04/2025 V5

2 of 3

AC LED Strip

POWER SUPPLIES, MOUNTINGS & EXTRUSIONS

POWER SUPPLIES - 24V

Forward Phase, Reverse Phase, & 0-10V Dimming Drivers. Outdoor enclosures available.

Part #	Ingress	Voltage	Wattage	Dimensions (inches / mm)	Description
045001	IP67	100-305V	20W	7.6 x 1.18 x 0.79 / 193 x 30 x 20	Dimmable LED Driver
045002	IP67	100-305V	40W	5.83 x 1.58 x 0.87 / 148 x 40 x 22	Dimmable LED Driver
045003	IP67	120-277V	60W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045004	IP67	120-277V	75W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045005	IP67	120-277V	96W	7.6 x 2.24 x 1.5 / 193 x 57 x 38	Dimmable LED Driver
045006	IP67	120-277V	200W	10.1 x 3.03 x 1.8 / 257 x 77 x 46	Dimmable LED Driver
045007	IP67	120-277V	300W	11.9 x 3.03 x 1.8 / 302 x 77 x 46	Dimmable LED Driver

ENCLOSURES

Part #	Ingress	Dimensions (inches / mm)	Description
045008	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	20W Enclosure
045009	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	40W Enclosure
045010	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	60W Enclosure
045011	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	75W Enclosure
045012	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	96W Enclosure
045013	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	200W Enclosure
045014	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	300W Enclosure

MOUNTING & EXTRUSIONS

Mounts directly with brackets, self adhesive transparent channels, or in aluminum extrusions.


For more extrusions, visit organiclighting.com.



AC LED Plastic Clip
#036110



Mounting Clip
#037005



PVC Clear Channel 39in (1m)
.57"W x .31"H (14.5 x 7.9mm)
#041007



1" Line Extrusion
0.95" x 2" (24.1 x 50.8mm)
#010982
1" Line Frosted Walk-over Lens
#010959



2" Line Extrusion | 1.73" x 2" (43.9 x 50.8mm)
#010985
2" Line Frosted Walk-over Lens
#010961
2" Line Frosted Decorative Lens
#010962

Project

Date