


# OrgaLED® Wallwash 24V DC



## FEATURES

- Flexible LED wallwasher tape light
- High Efficacy- 110 lm/W
- High Density- 7 LEDs per cuttable section
- 24V DC - Low Voltage, Class 2
- Up to 33ft(10m) Continuous Runs
- 2700K, 3000K, 4000K
- Dimmable
- Polycarbonate Optical Lens with Silicone encapsulation for durability, reliability, and ease of installation
- IP40 / IP67 Wet Location
- UL Listed
- 5 Years / 50,000 hrs Warranty
- Ambient working temperature -4°~104°F (-20°~40°C)

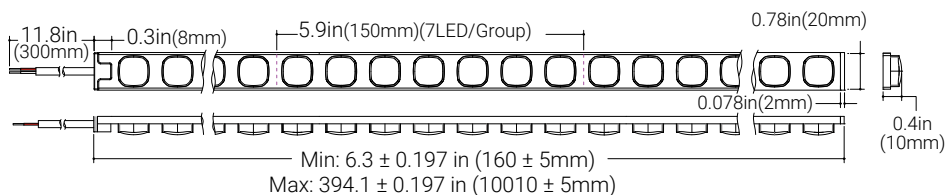

## PART NUMBER & SPECIFICATIONS

Part #	Color	CRI	Efficacy	lm/ft	lm/m	W/ft	W/m
<b>OrgaLED® Wallwash 15°</b>							
038411	2700K	>90	100 lm/W	580	1902.4	5.8	19
038421	3000K	>90	105 lm/W	610	2000.8	5.8	19
038441	4000K	>90	110 lm/W	640	2099.2	5.8	19
<b>OrgaLED® Wallwash 30°</b>							
038511	2700K	>90	100 lm/W	580	1902.4	5.8	19
038521	3000K	>90	105 lm/W	610	2000.8	5.8	19
038541	4000K	>90	110 lm/W	640	2099.2	5.8	19
<b>OrgaLED® Wallwash 45°</b>							
038611	2700K	>90	100 lm/W	580	1902.4	5.8	19
038621	3000K	>90	105 lm/W	610	2000.8	5.8	19
038641	4000K	>90	110 lm/W	640	2099.2	5.8	19

\*Data based on 40K

ORGANIC LIGHTING®

Project

Date

## ACCESSORIES



**Starter Cable | 6ft**  
IP40 / IP67  
#038051



**End Cap | IP40 / IP67**  
#038011



**Jumper Cable | 8in**  
IP40 / IP67  
#038031



**Inline Connector**  
IP40 / IP67  
#038021



**IP67 Waterproofing Kit**  
#011511



**Waterproof Mini J-Box**  
#PC-JBOX


Specifications may be modified or improved without notification

Organic Lighting | 12203 Magnolia Avenue, Suite 1, Riverside CA 92503 | 626.969.6140 | www.organiclighting.com | 04/2026 V10



# OrgaLED® Wallwash


## PHOTOMETRIC DATA - based on 40K

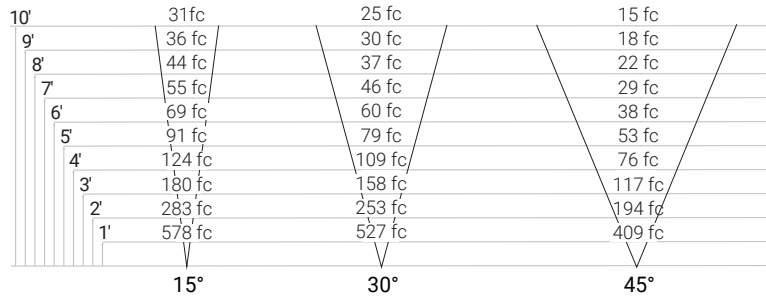

Project
Date

## MOUNTING & EXTRUSIONS (W x H x L)


**Plastic Channel (White) | 0.97 x 0.35 x 52in (24.6 x 8.9 x 1321mm)**  
#038067

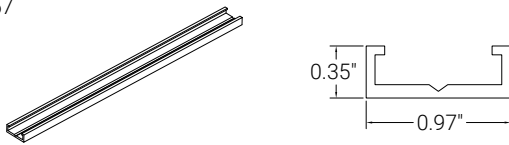


**LED Mounting Clip | 0.82 x 0.3 x 0.78in (21 x 8 x 20mm)**  
#038060




**Aluminum Profile (Black) |**  
#038061 0.93 x 0.81 x 48in (24 x 21 x 1219mm)  
#038061-96 0.93 x 0.81 x 96in (24 x 21 x 2438mm)

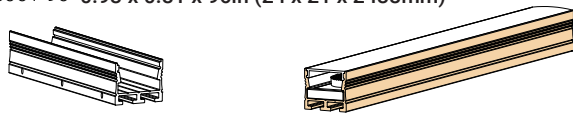


**Snap-in Clear Lens | 48in(1219mm) or 96in(2438mm)**  
#038062




**End Cap w/ Power Hole (Black)**  
#038063




**End Cap (Black)**  
#038064




**Swivel Mount (Black) | 1.1in (28mm) width**  
#038065

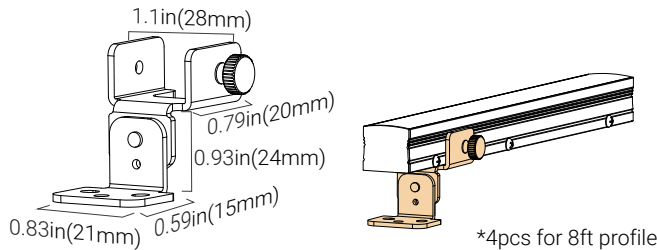

**Aluminum Mounting Clip**  
0.98 x 0.5 x 0.39in (25 x 13 x 10mm)  
#038066

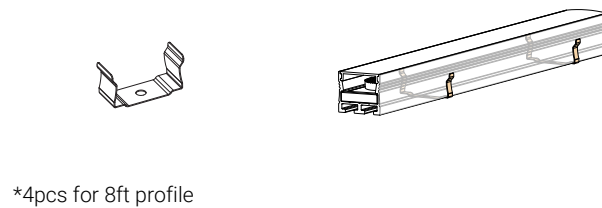


**Extended Connectors (2pc Set) | 0.35 x 0.1 x 1.6 (8.9 x 2.5 x 40mm)**  
#038068



\*Set screws included

**Inner Clip | 1.1 x 0.38 x 0.98in (28 x 9.7 x 25mm)**  
#038069

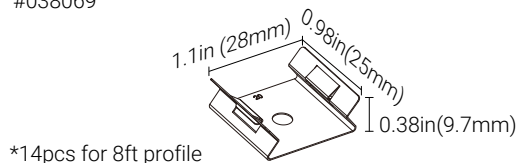

Specifications may be modified or improved without notification

## POWER SUPPLIES, ENCLOSURES & WIRING DIAGRAM

Project

Date

### POWER SUPPLIES - 24V

Forward Phase, Reverse Phase, & 0-10V Dimming Drivers. Remote enclosures available.

Part #	Ingress	Voltage	Wattage	Dimensions (inches / mm)	Description
045001	IP67	100-305V	20W	7.6 x 1.18 x 0.79 / 193 x 30 x 20	Dimmable LED Driver
045002	IP67	100-305V	40W	5.83 x 1.57 x 0.87 / 148 x 40 x 22	Dimmable LED Driver
045003	IP67	120-277V	60W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045004	IP67	120-277V	75W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045005	IP67	120-277V	96W	7.6 x 2.24 x 1.5 / 193 x 57 x 38	Dimmable LED Driver
045006	IP67	120-277V	200W	10.1 x 3.03 x 1.8 / 257 x 77 x 46	Dimmable LED Driver
045007	IP67	120-277V	300W	11.9 x 3.03 x 1.8 / 302 x 77 x 46	Dimmable LED Driver

### ENCLOSURES

Part #	Ingress	Dimensions (inches / mm)	Description
045008	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	20W Enclosure
045009	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	40W Enclosure
045010	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	60W Enclosure
045011	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	75W Enclosure
045012	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	96W Enclosure
045013	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	200W Enclosure
045014	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	300W Enclosure

### WIRING DIAGRAM

