



OrgaGlide 1[™] Channel PATENT PENDING for Top bending OrgaLED[™]

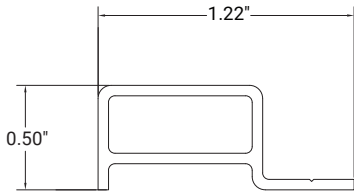


- Surface, wall, floor, recessed mounting.
- UV inhibited rigid polycarbonate.
- Easy alignment for continuous runs.
- Quick installation with double-sided adhesive or 6-32 screws (by others).
- Designed for OrgaLED[™] LED strips.
- 8ft lengths.

Extrusion w/ OrgaGlide 1[™]




Cove Mounted OrgaGlide 1[™]

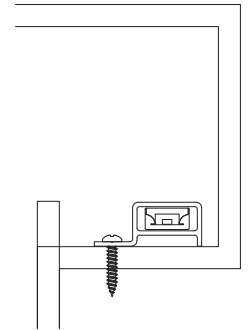


Organic Lighting's OrgaGlide 1[™] Channel solves the problems of installing and replacing long runs of OrgaLED[™] and Aqueon flexible strip lighting, in hard to reach places, eliminating the need to move lifts or ladders to multiple locations, and enabling up to 66 feet of flexible lighting strip to be installed from a single location. OrgaGlide 1[™] Channel replaces push-fit channels, staples and all other forms of flexible strip lighting support. Saving upto 80% of typical labor and enabling future maintenance or replacement. The specially designed tubes can be installed within extrusions, with or without lenses or mount directly into coves with double sided HB adhesive tape or screws, creating channels of infinite lengths.


INSTALLATION

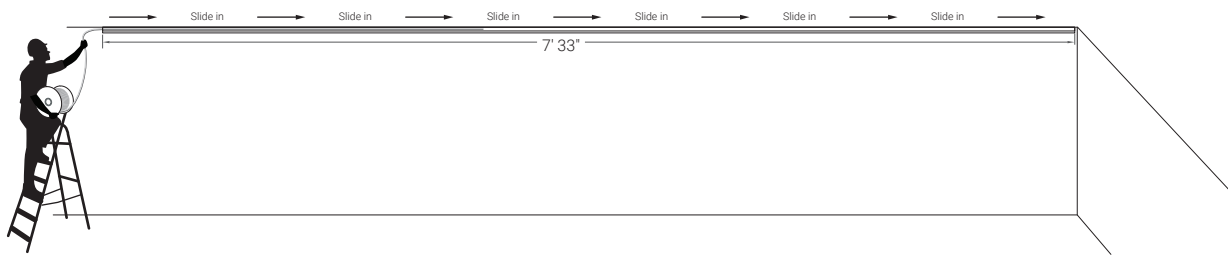


1 Use double-sided adhesive under the Mounting Tab or 6-32 screws (by others) to mount OrgaGlide 1[®] Channel to surface.

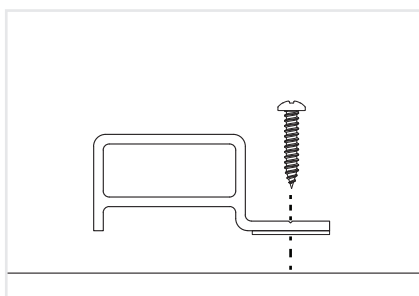

2 Align sections carefully. There should be no gaps when joining OrgaGlide 1[®] Channels. Use a ruler for perfect alignment.

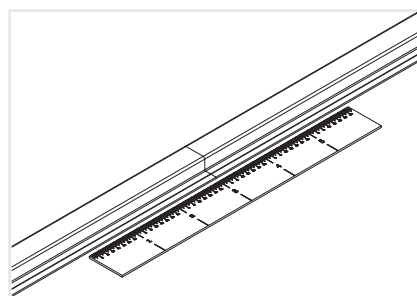

3 Install OrgaGlide 1[®] Channels with a 2" gap for Bi-directional feeds.

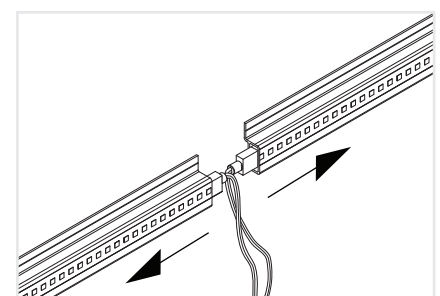

PART NUMBER & SPECIFICATIONS

OrgaGlide 1 Channel

Part #	Description
012957	OrgaGlide 1 Channel

Specifications may be modified without notification.