



Index

AVAILABLE COLORS	1
PRODUCT CODES & CHARACTERISTICS	2
BENDING RADIUS	2
POWER & CONNECTION DIAGRAM	3
POWER SUPPLY CONSUMPTION	3
CABLE SELECTION	4
SYMBOLS & DISCLAIMER	5

Features

- Made in USA/EU
- Very flexible (bend radius > 0.79")
- Ideal for small indoor spaces
- Dimmable
- Effective heat dissipation
- Excellent lumen/ Watt ratio
- Binning ± 50K
- Available in long lengths
- Available in two outputs
- Extensive range of accessories
- Plug & Play system





PCB RGB
160/240


The OrgaLED® PCB RGB LED strip (IP20) is a high quality, flexible LED strip equipped with 3M double sided tape. Thanks to its small dimensions the PCB LED strip is ideal for usage in small (indoor) spaces.

For the latest version of this datasheet, visit our website:
www.organiclighting.com

Available Colors


-  OrgaLED® PCB RGB 160
-  OrgaLED® PCB RGB 240

Symmetric Diagram

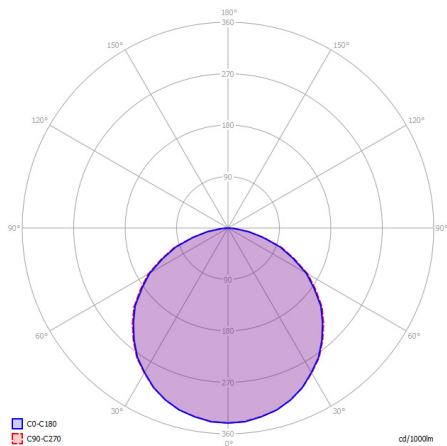




Product Codes & Characteristics

	PCB RGB 160 Deco	PCB RGB 240 Power
Product code	012187	012139
Power (24 V DC)	1.46 W/ft	2.26 W/ft
- Red	0.61 W/ft	0.82 W/ft
- Green	0.61 W/ft	0.88 W/ft
- Blue	0.24 W/ft	0.61 W/ft
Power (25 V DC)	1.52 W/ft	2.35W/ft
CRI	> 80	
Luminous flux	48.78 lm/ft (R-14.93, G-32.62, B-3.65)	71.65lm/ft (R-24.7, G-45.12, B-7.32)
Luminous efficiency	33.4 lm/W	31.7 lm/W
Spool length	Max. 164 ft	
Section length	7.87 in	
LED	MULTILED	
Number of LEDs	7 per section / 10.67 per ft	
Max. connection length	32.8 ft	16.4 ft
Operation voltage	24 V DC	
Max. operation voltage	25 V DC	
Beam angle	120°	
Dimensions	0.31 x 0.09 in	
Dimmable	PWM dimming, 0-10V dimming	
Binning	± 50K (single bin)	
Weight	0.1 oz/ft	
Expected lifetime	B50/L70 > 50,000 hours @ 104 °F	
Degree of protection (IP)	IP20	
Storage temperature	-22 °F - 185 °F	
Operation temperature	-22 °F - 131 °F	
Minimal bending radius	0.79 in	
Max. connection length between 4 °F and -22 °F is 23 ft (RGB 160) and 11.5ft (RGB 240)		




Bending Radius

Maximum bending radius is 0.79 in. Solely bend up or downward. Do not compress, stretch or bend the LED strip.

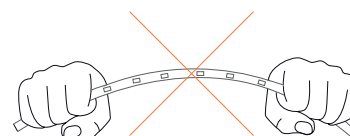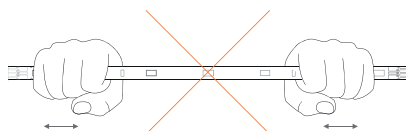

Power & Connection Diagram

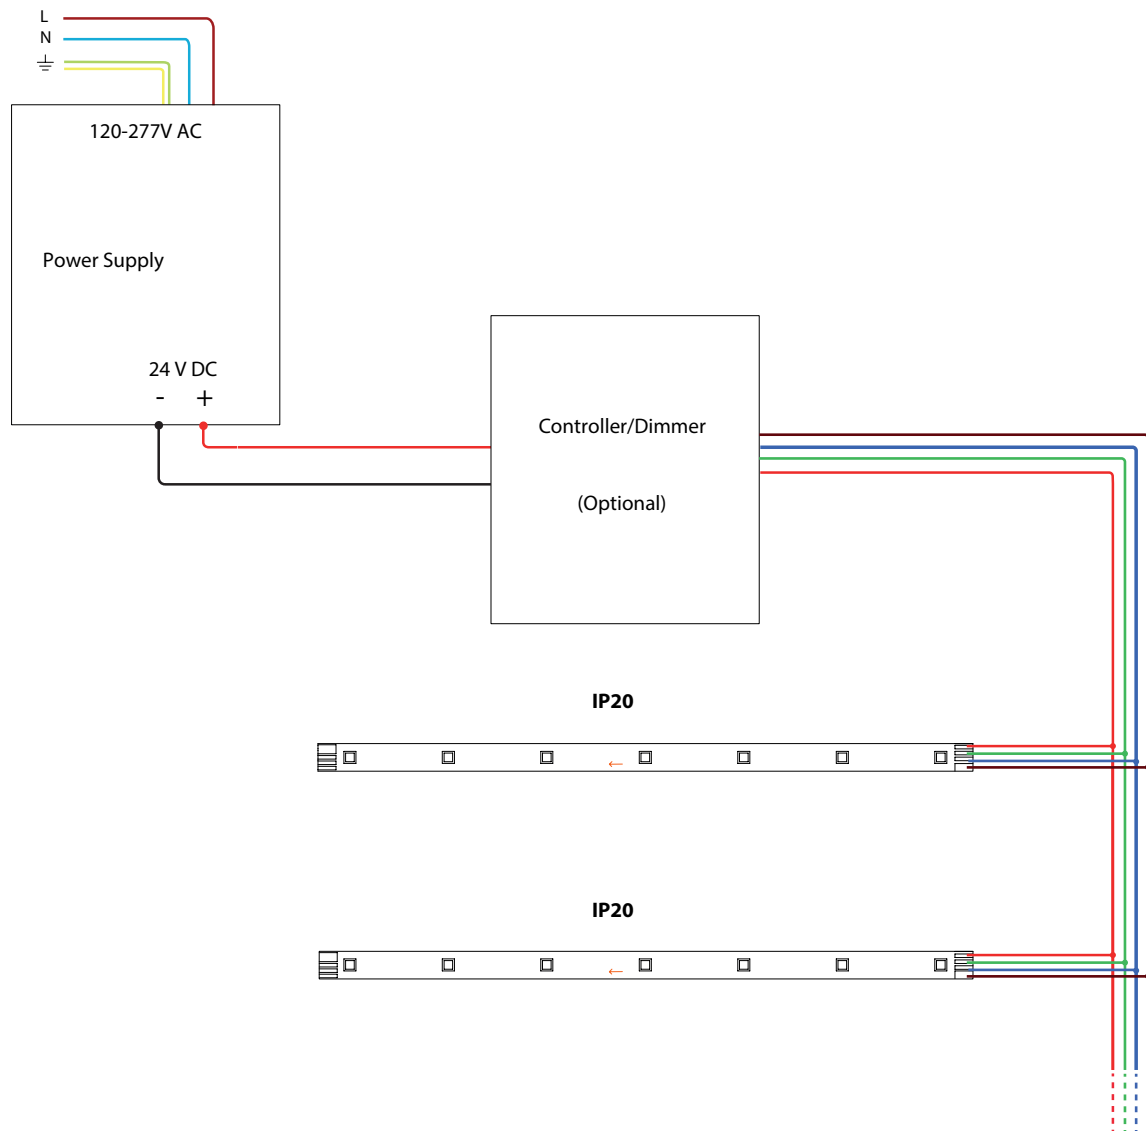

Power Supply - 24V DC

To calculate the power consumption of a single length of LED strip, use the equation below.

$$P_{\text{STRIP}} = W_{\text{WATTS}} \times X_{\text{LENGTH}} \times 110\%$$


P_{STRIP}	Calculated power consumption of one LED strip in Watt
W_{WATTS}	Typical power consumption in Watt per foot of the selected LED strip This value can be found under 'Product characteristics' on page 2
X_{LENGTH}	Length of the connected LED strip in feet
110%	Safety margin to buffer differences over all production batches

Cable Selection

The OrgaLED® LED strips need a minimum voltage at the beginning of the LED strip to function according to the specifications. The table below gives an indication of the maximum cable length based on the cable thickness and power supply voltage. The connection between the cable and LED strip is with a 1 cable length of 3.28 ft.

In case the required length is larger than the length mentioned in this table, the supply voltage is different or if a detailed wire plan with branches is planned, please contact your distributor for a detailed cable calculation.

Wire Gauge	LED strip	Max. cable x length RGB 160		Max. cable x length RGB 240	
		@ 24 V DC	@ 25V DC	@ 24 V DC	@ 25V DC
20 AWG x 2	3.28 ft	206.05 ft	399.27 ft	134.55 ft	262.01 ft
	6.56 ft	101.06 ft	197.67 ft	65.3 ft	129.04 ft
	16.4 ft	38.08 ft	76.72 ft	23.75 ft	49.23 ft
	32.8 ft	17.06 ft	36.38 ft	-	-
18 AWG x 2	3.28 ft	441.29 ft	855.06 ft	282.97 ft	550.91 ft
	6.56 ft	141.5 ft	279.42 ft	88.79 ft	178.1 ft
	16.4 ft	81.51 ft	164.26 ft	49.95 ft	103.55 ft
	32.8 ft	36.54 ft	77.93 ft	-	-
16 AWG x 2	3.28 ft	882.62 ft	1710.16 ft	565.93 ft	1160.96 ft
	6.56 ft	432.89 ft	846.67 ft	274.67 ft	542.64 ft
	16.4 ft	163.05 ft	328.56 ft	99.91 ft	207.1ft
	32.8 ft	73.11 ft	155.87 ft	-	-
14 AWG x 2	3.28 ft	1468.95 ft	2846.22 ft	941.85 ft	1833.82 ft
	6.56 ft	720.45 ft	1409.09 ft	457.13 ft	903.08 ft
	16.4 ft	271.35 ft	546.81 ft	166.26 ft	344.66 ft
	32.8 ft	121.66 ft	259.38 ft	-	-

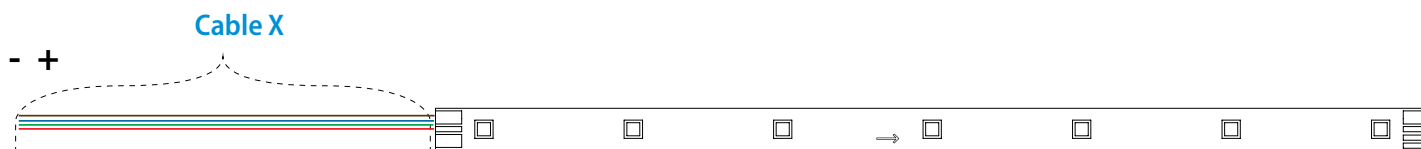

Symbols



UL is a world leader in product safety testing and certification. UL sets standards and tests products to make sure they meet standards.



The ETL Listed mark indicates that your product has been tested by Intertek and found in compliance with accepted UL standards.



Electro Static Discharge (ESD) sensitive device, apply standard ESD precautions when handling the product.



Manufacturer's declaration that the product meets the applicable EC directives.



Suitable for mounting on all surfaces and suitable to cover with insulating material.



Restriction of Hazardous Substances (RoHS): product complies with the RoHS directive and each homogeneous material does not exceed the limits for the materials mentioned under the RoHS directive (Pb, Hg, Cd, Cr6+, PBB and PBDE).



Protected against ingress of solid foreign objects ≥ 0.49 inches. Not-protected against ingress of water.



Bending of the LED strip is possible with a radius of ≥ 0.79 inches in the specified direction.



Electrical appliance class III: this product is designed to be supplied from an extra-low voltage (≤ 60.0 V DC or ≤ 42.4 V AC).



System guarantee of 5 years when the complete system consist of OrgaLED® products with the 5 year system warranty logo.

Disclaimer

The published information is checked to be as accurate as possible, however Organic Lighting, or any reseller of OrgaLED® cannot be held liable for any damages resulting from errors or outdated information. Organic Lighting reserves the right to modify the information without informing the costumers. When this document is printed or downloaded, please check for the latest version on the internet, the most up to date information will be published on www.organiclighting.com. This product should not be used in applications, devices or systems where incorrect operation of the product may result in personal injury (includes emergency lighting) without written permission from the board of Organic Lighting. If nevertheless used in such applications, devices or systems Organic Lighting cannot be held liable for any resulting injury.