

Aqueon® Diffuse Mono Standard & High Power



HIGH POWER

A new standard of flexible light; superior standards new materials, new methods, military grade components and advanced circuit design to create a flood proof; vibration proof seamless light. Our constant current design ensures to maintain a full illumination in continuous lengths up to 33ft(10m). Available in both vertical and horizontal bending. IP67 or IP68 submersible. Very High lumen output.


Project

Date

PART NUMBER & SPECIFICATIONS

Part #	Color	CRI	lm/ft	lm/m	Max Run	W/ft	W/m	
High Power Aqueon® Diffuse Mono - Horizontal Bend								
052204-15	2200K	>95	152	500	33ft	10m	4.57	15
052205-15	2700K	>95	183	600	33ft	10m	4.57	15
052236-15	3000K	>95	183	600	33ft	10m	4.57	15
052237-15	3500K	>95	213	700	33ft	10m	4.57	15
052238-15	4000K	>95	213	700	33ft	10m	4.57	15
052239-15	5700K	>95	213	700	33ft	10m	4.57	15
052210-8	Red	>95	50	165	33ft	10m	2.44	8
052211-12	Green	>95	137	450	33ft	10m	3.66	12
052212-12	Blue	>95	34	110	33ft	10m	3.66	12
052213-8	Amber	>95	50	165	33ft	10m	2.44	8


HORIZONTAL BENDING



High Power Aqueon® Diffuse Mono - Vertical Bend

052203-15	2200K	>95	183	600	33ft	10m	4.57	15
052229-15	2700K	>95	213	700	33ft	10m	4.57	15
052230-15	3000K	>95	213	700	33ft	10m	4.57	15
052231-15	3500K	>95	244	800	33ft	10m	4.57	15
052232-15	4000K	>95	244	800	33ft	10m	4.57	15
052233-15	5700K	>95	244	800	33ft	10m	4.57	15
052206-8	Red	>95	56	185	33ft	10m	2.44	8
052207-12	Green	>95	168	550	33ft	10m	3.66	12
052208-12	Blue	>95	37	120	33ft	10m	3.66	12
052209-8	Amber	>95	56	185	33ft	10m	2.44	8

VERTICAL BENDING



Specifications may be modified or improved without notification



Aqueon® Diffuse Mono Standard & High Power




CONNECTORS & ACCESSORIES

Factory assembled 2-wired Aqueon Mono IP68 submersible accessories include end caps, extension cords and connectors with customizable cord lengths. IP67 self assembly connectors are also available.


Project

Date


FACTORY ASSEMBLED IP68 CONNECTORS

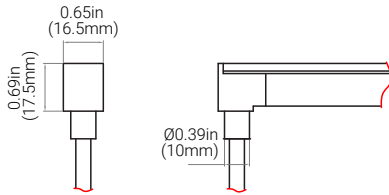


Bottom Feed Connector, 16'L
#052250-CU16

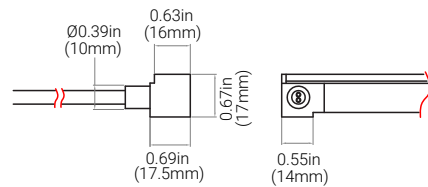


Side Feed Connector, 16'L
#052263-CU16

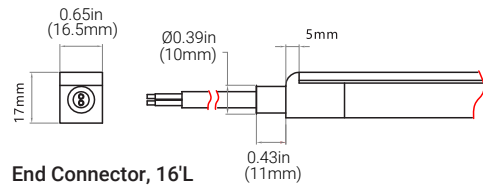


End Connector, 16'L
#052278-CU16

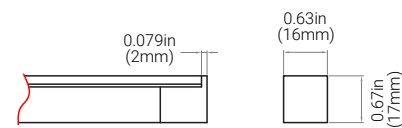

End Cap
#052286




Extension
#052279 L available in 0.3m-1m

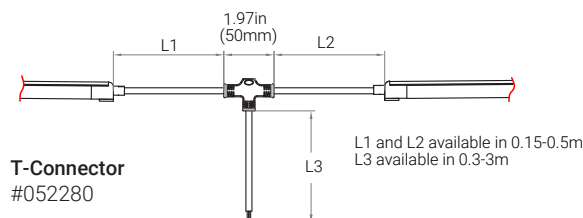


T-Connector
#052280 L1 and L2 available in 0.15-0.5m
L3 available in 0.3-3m


FIELD ASSEMBLY SNAP IP67 CONNECTORS




Bottom Snap Connector, 16'L
#052250S-CU16




Side Feed Snap Connector, 16'L
#052263S-CU16




End Snap Connector, 16'L
#052278S-CU16



Snap End Cap
#052286S

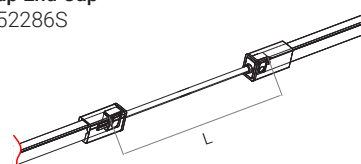

Snap Extension
#052279S L available in 0.3m, 1m, 3m

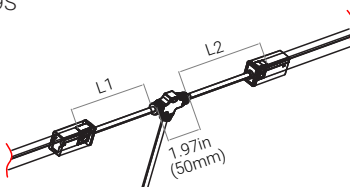

Snap T-Connector
#052280S L1 and L2 available in 0.3m

Specifications may be modified or improved without notification



Aqueon® Diffuse Mono Standard & High Power



POWER SUPPLIES - 24V

Forward Phase, Reverse Phase, & 0-10V Dimming Drivers. Remote enclosures available.

Part #	Ingress	Voltage	Wattage	Dimensions (inches / mm)	Description
045001	IP67	100-305V	20W	7.6 x 1.18 x 0.79 / 193 x 30 x 20	Dimmable LED Driver
045002	IP67	100-305V	40W	5.83 x 1.57 x 0.87 / 148 x 40 x 22	Dimmable LED Driver
045003	IP67	120-277V	60W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045004	IP67	120-277V	75W	6.3 x 2.24 x 1.5 / 160 x 57 x 38	Dimmable LED Driver
045005	IP67	120-277V	96W	7.6 x 2.24 x 1.5 / 193 x 57 x 38	Dimmable LED Driver
045006	IP67	120-277V	200W	10.1 x 3.03 x 1.8 / 257 x 77 x 46	Dimmable LED Driver
045007	IP67	120-277V	300W	11.9 x 3.03 x 1.8 / 302 x 77 x 46	Dimmable LED Driver

ENCLOSURES

Part #	Ingress	Dimensions (inches / mm)	Description
045008	IP67	9.4 x 2.6 x 1.9 / 239 x 66 x 48	20W Enclosure
045009	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	40W Enclosure
045010	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	60W Enclosure
045011	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	75W Enclosure
045012	IP67	11.02 x 4.05 x 2.2 / 280 x 103 x 56	96W Enclosure
045013	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	200W Enclosure
045014	IP67	16.7 x 9.8 x 2.3 / 424 x 249 x 58	300W Enclosure
PC-JBOX	IP67	4.25 x 1.63 x 1.25 / 108 x 41 x 32	Waterproof J-Box

DMX CONTROLLER

Part #	Description
011343	100W Digital Controller
011344	180W Digital Controller
011345	720W Digital Controller
011341	Digital Controller & Power Supply Combination
011410	Nicolaude DE3 DMX 512 Controller
011403	Nicolaude DINA-DR1 DMX 512 Controller
050203	LT-200 SPI Controller - For Pixel
050205	DMX512 SPI Converter Decoder - For Pixel

MOUNTINGS & EXTRUSIONS

Mounting Channels to Match any Installation

Aluminum Profile



- High Quality Aluminum
- Lightweight
- Cost Effective
- Warp/corrosion resistant

1.38in(35mm) L - #053001
39.37in(1000mm) L - #053000

Flanged Aluminum Profile



- High Quality Aluminum
- Lightweight
- Cost Effective
- Flange for Recessed Installation

1.38in(35mm) L - #053003
39.37in(1000mm) L - #05302

Flanged Internal Serrated Aluminum Profile



- Lightweight
- Easy to Install & Dismantle
- Continuous & Strong Gripping
- Flange for Recessed Installation

0.79in(20mm) L - #053011
39.37in(1000mm) L - #053010

Internal Serrated Aluminum Profile



- Continuous & Strong Gripping
- Lightweight
- Easy to Install & Dismantle
- For Suspended Installations

0.79in(20mm) L - #053009
39.37in(1000mm) L - #053008

Bendable Serrated Aluminum Profile



- High Quality Aluminum
- Easy to Install & Dismantle
- Continuous & Strong Gripping
- Memory Retaining
- Perfect for Curved Installations

19.68in(500mm) L - #053013
39.37in(1000mm) L - #053012

Thickened Plastic Profile



- Plastic Profile 0.12in(3mm) thick
- Lightweight
- Cost Effective
- Rust & Corrosion Resistant

1.38in(35mm) L - #053005
39.37in(1000mm) L - #053004

Project

Date

20W -60W Dimmable Driver



75W -300W Dimmable Driver



Digital Controller (100W, 180W, 720W)



Nicolaude DE3 DMX 512 Controller



Specifications may be modified or improved without notification



MOUNTINGS & EXTRUSIONS (CONTINUED)

Raceway Aluminum Profile



- Surface-mounted
- Serrated Aluminum Profile

39.37in(1000mm) L
#053021

Suspended Raceway Aluminum Profile



- Suspended
- Serrated Aluminum Profile

39.37in(1000mm) L
#053022

Raceway End Cap



#053023

Raceway Splice Connector



#053024

Stainless Steel Clip



- High Quality Stainless Steel
- Lightweight
- Cost Effective

1.38in(35mm) L
#053020

Silicone 3D Bend Profile White



- Silicone
- Bendable Anole Profile

39.37in(1000mm) L
#053026-WH

Silicone 3D Bend Profile Black




- Silicone
- Bendable Anole Profile

39.37in(1000mm) L
#053026-BL

CABLE REQUIREMENT

The Aqueon® LED strips need a minimum voltage at the beginning of the LED strip to function according to the specifications. The table below gives an indication of the maximum cable length based on the cable thickness. The standard starter cable is (18 AWG), see table below for max cable lengths.

In case the required length is longer than the length mentioned in this cable, it is recommended to cut the starter cable down to 1ft (0.3m) and splice a larger gauge cable. Please contact your distributor for a detailed cable calculation.

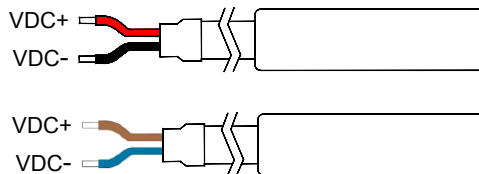

Cable X Information	LED Strip	Max. Cable Length
		24V
18 AWG x 2 *Standard	3.28ft / 1m	632.1ft / 192.7m
	16.4ft / 5m	124.2ft / 37.8m
	32.8ft / 10m	62.4ft / 19.0m
	49.2ft / 15m	41.8ft / 12.7m
16 AWG x 2	3.28ft / 1m	1030ft / 314m
	16.4ft / 5m	202.3ft / 61.7m
	32.8ft / 10m	101.6ft / 31.0m
	49.2ft / 15m	68.1ft / 20.7m
14 AWG x 2	3.28ft / 1m	1615.3ft / 492.3m
	16.4ft / 5m	317.3ft / 96.7m
	32.8ft / 10m	159.4ft / 48.6m
	49.2ft / 15m	106.7ft / 32.5m